



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : B01D 67/00, 61/00, B01J 39/20, 47/12, 20/32</p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 00/50160</b></p> <p>(43) International Publication Date: 31 August 2000 (31.08.00)</p>
<p>(21) International Application Number: PCT/US00/04745</p> <p>(22) International Filing Date: 25 February 2000 (25.02.00)</p> <p>(30) Priority Data: 60/121,668 25 February 1999 (25.02.99) US</p> <p>(71) Applicant (for all designated States except US): PALL CORPORATION [US/US]; 2200 Northern Boulevard, East Hills, NY 11548-1209 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): HOU, Chung-Jen [US/US]; 2258 Oxford Drive, Pensacola, FL 32503 (US). KONSTANTIN, Peter [DE/DE]; Merxhauser Strasse 16, D-37627 Heinade (DE). YANG, Yujing [CN/US]; 7791 Northpoint Boulevard, Pensacola, FL 32514 (US).</p> <p>(74) Agent: JAY, Jeremy, M.; Leydig, Voit &amp; Mayer, Ltd., 700 Thirteenth Street, N.W., Suite 300, Washington, DC 20005 (US).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: <b>NEGATIVELY CHARGED MEMBRANE</b></p> <p>(57) Abstract</p> <p>The present invention provides, in certain embodiments, a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating having fixed negative charges. The crosslinked coating can be prepared, e.g., from a polymerized composition comprising an unsaturated monomer having an anionic group, an N-(hydroxymethyl) - and/or N-(alkoxymethyl) - acrylamide, a hydrophilic unsaturated monomer, and an initiator. The present invention further provides, in some embodiments, a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating prepared from a polymerized composition comprising an unsaturated monomer having an anionic group, an N-(hydroxymethyl) - or N-(alkoxymethyl) - acrylamide, a polysaccharide, and an initiator. The membranes of the present invention are suitable for use in ion exchange chromatography, for example, in the separation and purification of positively charged species such as proteins.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## NEGATIVELY CHARGED MEMBRANE

CROSS-REFERENCE TO A RELATED APPLICATION

This application claims priority from U.S. Provisional  
5 Patent Application No. 60/128,668, filed on February 25, 1999,  
the disclosure of which is incorporated herein by reference in  
its entirety.

FIELD OF THE INVENTION

10 The present invention generally relates to negatively  
charged membranes, and in particular to negatively charged  
membranes comprising a porous substrate and a crosslinked  
coating. The membranes find use in the treatment of fluids  
containing positively charged species such as proteins, e.g.,  
15 in ion-exchange chromatography.

BACKGROUND OF THE INVENTION

Negatively charged ion-exchange membranes have been  
proposed for the separation and/or purification of  
20 biomolecules such as proteins, amino acids, and nucleic acids.  
For the ion exchange membrane to perform effectively in the  
above applications, the membrane should satisfy several  
important parameters. For example, the membrane should  
exhibit high rates of fluid flow. The membrane should have  
25 high dynamic binding capacity for biomolecules, and should be  
capable of selectively binding the biomolecules, which have  
different surface charges. The membrane should, therefore,  
have low non-specific binding, e.g., resulting from  
hydrophobic interactions. The membrane should withstand high  
30 treatment fluid velocities. The preparation of the membrane  
should not involve chemistries and processes that are  
cumbersome to practice. Some of the cation exchange membranes  
known heretofore suffer from the failure to satisfy one or  
more of the parameters set forth above.  
35 Accordingly, there exists a need for a cation exchange  
membrane that exhibits high rates of fluid flow. There  
further exists a need for a cation exchange membrane that has

high dynamic binding capacity and selectivity for biomolecules. There further exists a need for a membrane that has low non-specific binding or low binding that results from hydrophobic interactions. There further exists a need for a  
5 membrane that can withstand high fluid flow velocities. There further exists a need for a membrane that involves preparation chemistries and/or processes that are not cumbersome to practice.

These advantages of the present invention, as well as  
10 additional inventive features, will be apparent from the description of the invention provided herein.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 depicts the breakthrough curve for lysozyme  
15 obtained on an embodiment membrane of the present invention. The x-axis represents the filtration time, and the y-axis represents the absorbance of the filtrate at 280 nm and is indicative of the concentration of the protein. See Example 2 for additional details.

Fig. 2 depicts the breakthrough curve for lysozyme  
20 obtained on another embodiment membrane of the present invention. The x-axis and y-axis are as described in Fig. 1. See Example 3 for additional details.

Fig. 3 depicts the breakthrough curve for lysozyme  
25 obtained on another embodiment membrane of the present invention. The x-axis and y-axis are as described in Fig. 1. See Example 4 for additional details.

#### **BRIEF SUMMARY OF THE INVENTION**

30 Many of the foregoing needs have been fulfilled by the present invention which provides a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating having negatively charged groups. In a preferred embodiment, the membrane can be prepared from a  
35 polymerized composition comprising an unsaturated monomer having an anionic group, at least one or more N-

(hydroxyalkyl)- and/or N-(alkoxyalkyl)- acrylamides, and a hydrophilic unsaturated monomer.

The present invention further provides a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating prepared from a hydroxyl-rich material such as a polysaccharide and a polymerized composition comprising an unsaturated monomer having an anionic group, at least one or more N-(hydroxymethyl)- and/or N-(alkoxymethyl)- acrylamides, and an initiator.

The present invention further provides a negatively charged microporous membrane having a protein binding capacity of about 25 mg/ml lysozyme or more comprising a porous substrate and a crosslinked coating that provides a fixed negative charge. The present invention further provides a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating comprising a polymer having anionic groups and amide-amide and amide-ester crosslinks.

The membranes of the present invention are advantageously free of covalent bonds or grafts with the substrate.

The present invention further provides a process for preparing an embodiment of the membrane comprising coating a porous substrate with a polymerized composition comprising an anionic group and curing the membrane. The membrane can be optionally washed or leached to remove extractable residue therein.

The present invention further provides devices, e.g., filter devices, chromatographic devices, macromolecular transfer devices, and membrane modules comprising the membranes of the present invention. The present invention further provides a process for separating a positively charged material such as positively charged atoms, molecules, and particulates, and, preferably, biomolecules, from a fluid, the process comprising placing the fluid in contact with the negatively charged microporous membrane so as to adsorb the positively charged material to the membrane. The present invention further provides a process for treating a fluid

containing positively charged materials comprising contacting the fluid with a membrane of the present invention and selectively releasing the positively charged materials. The present invention further provides a process for transferring  
5 macromolecules from a device or element such as an electrophoresis gel comprising contacting the gel with the membrane of the present invention and transferring the biomolecules to the membrane.

While the invention has been described and disclosed below  
10 in connection with certain preferred embodiments and procedures, it is not intended to limit the invention to those specific embodiments. Rather it is intended to cover all such alternative embodiments and modifications as fall within the spirit and scope of the invention.

15

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention provides embodiments of negatively charged membranes having high charge density, high water flow rates, high dynamic protein binding capacity, and low non-  
20 specific protein binding capacity. The membranes of the present invention find use in cation exchange chromatography and in the separation and/or purification of charged species, especially biomolecules such as proteins.

The present invention provides, in some embodiments, a  
25 negatively charged microporous membrane comprising a porous substrate and a crosslinked coating having anionic groups. The crosslinked coating can be prepared from a polymerized composition comprising an unsaturated monomer having an anionic group, at least one or more N-(hydroxyalkyl)- or N-  
30 (alkoxyalkyl)- acrylamides, a hydrophilic unsaturated monomer. The composition can further include an initiator. In preferred embodiments, the N-(hydroxyalkyl)- or N-(alkoxyalkyl)- acrylamide is one wherein the alkyl moiety has 4 or less carbon atoms, and more preferably the alkyl moiety  
35 is methyl.

In certain embodiments, the membrane comprises a porous substrate and a crosslinked coating prepared from a

polymerized composition comprising an unsaturated monomer having an anionic group, at least one or more N-(hydroxymethyl)- and/or N-(alkoxymethyl)- acrylamides, a hydroxyl-rich material such as a polysaccharide, and optionally an initiator. The present invention further provides a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating comprising a polymer having anionic groups and amide-amide and amide-ester crosslinks.

10       The membrane of the present invention contains fixed anionic groups. The anionic group can be any negatively charged group - sulfonic, carboxylic, phosphonic, and the like, preferably sulfonic or carboxylic acid groups. The coating composition comprises an unsaturated monomer having an anionic group. Any suitable unsaturated monomer - vinyl, vinyl aromatic, acrylic, or other monomer can be used.

          The unsaturated monomer preferably is an acrylic monomer. The acrylic monomer can be an acrylate or an acrylamide. The acrylic monomer is preferably an acrylamide. The term "acrylamide" herein refers to unsubstituted as well as substituted monomers having a  $\text{-C=C-(C=O)-N-}$  moiety. The nitrogen and the C=C carbon atoms can be attached to hydrogen or other nonpolar substituents. An example of such substituents is alkyl. Thus, the substituted acrylamide can be alkylacrylamide. The term "alkyl" herein refers to an alkyl group having from 1 to about 10 carbon atoms, preferably from 1 to about 6 carbon atoms, and more preferably from 1 to about 3 carbon atoms. An example of an acrylamide monomer having a sulfonic acid group is acrylamido-N-alkylsulfonic acid, preferably 2-acrylamido-2-methyl-1-propanesulfonic acid. Preferred examples of acrylic monomers having a carboxylic acid group are 3-acrylamido-3-methylbutanoic acid (AMBA), 2-acrylamidoglycollic acid, and  $\beta$ -carboxyethyl acrylate.

          In certain embodiments, the coating composition comprises a hydrophilic unsaturated monomer, e.g., a nonionic hydrophilic unsaturated monomer. Any suitable hydrophilic unsaturated monomer can be used, preferably an acrylic

monomer. The monomer contains one or more polar groups that contribute hydrophilicity. Examples of such groups include hydroxy, alkoxy, hydroxyalkyl, and amido. Preferred hydrophilic groups are hydroxyl and hydroxyalkyl. Thus, preferred hydrophilic acrylic monomers are hydroxyacrylic and hydroxyalkylacrylic. The acrylic monomer can be an acrylate ester or an acrylamide. An example of a preferred hydroxyalkyl acrylate monomer is hydroxypropyl methacrylate.

The coating composition comprises a crosslinking agent. Any suitable crosslinking agent known to those of ordinary skill in the art can be used. Preferred crosslinking agents include N-(alkoxymethyl)acrylamide and N-(hydroxymethyl)acrylamide. N-(isobutoxymethyl)acrylamide is further preferred.

The coating composition preferably comprises an initiator. Any suitable initiator - free radical initiator, photoinitiator, and the like, can be used. A free radical initiator is preferred. An example of a suitable free radical initiator is a persulfate such as ammonium persulfate.

Without being bound to any particular theory, it is believed that the use of the three monomers in certain embodiments contributes to increased spatial separation of charges. Thus, it is believed that the distance between the anionic groups is increased. This increased distance disfavors association of the anionic groups. Accordingly, inter- and/or intra- chain association of anionic groups is reduced compared to a system wherein only an anionic monomer and a crosslinking monomer are employed, particularly in a two monomer system wherein a hydrophilic or hydroxyl-rich material such as a polysaccharide is not employed. The reduced association makes the negatively charged groups available for interaction with positively charged molecules in the treated fluid. This results, for example, in enhanced dynamic protein binding capacity.

The membrane according to some embodiments is made from a coating composition that includes a hydroxyl-rich material, which may be a small molecule or a polymer having a plurality



of hydroxyl groups, e.g., two, three, four or more hydroxyl groups per molecule. Examples of hydroxyl-rich materials include polysaccharides and polyvinyl alcohol, preferably polysaccharides. Without being bound to any particular  
5 mechanism, it is believed that the hydroxyl groups of the hydroxyl-rich material involve in hydrogen bonding with the fluid. The saccharide ring repeat units exert steric effects. Operation of one or both of these mechanisms results in increased charge separation among the anionic groups. The  
10 increased charge separation is believed to reduce anion association and facilitate interaction between the anionic sites and the positively charged species in the treated fluid.

Any suitable polysaccharide can be used, preferably a water soluble polysaccharide. An example of a preferred  
15 polysaccharide is dextran. The molecular weight of the dextran is below about 40,000,000, e.g., from about 10,000 to about 2,000,000, preferably from about 10,000 to about 500,000, and more preferably from about 10,000 to about 300,000. Particular examples of suitable molecular weights  
20 include 110,000 and 148,000.

The coating composition of certain embodiments can be prepared by combining and polymerizing the acrylic monomer having an anionic group, the nonionic hydrophilic monomer, a crosslinking agent, and the initiator. In some embodiments,  
25 the coating solution is prepared by combining and polymerizing the acrylic monomer having an anionic group, the polysaccharide, the crosslinking agent, and the initiator.

The polymerization can be carried out in a solvent, preferably in water or water/methanol solution. The  
30 polymerization is preferably stopped prior to the formation of a gel or excessive crosslinking. The viscosity of the polymerization solution can be monitored to control the degree of polymerization. The polymerization is carried out for any suitable length of time, e.g., for about 4 hours or more.  
35 According to certain embodiments, the polymerization is carried out for a period of from about 4 hours to about 5 hours. According to certain other embodiments, the


polymerization is carried out for a period of from about 16 hours to about 24 hours. The viscosity of the solution is typically below about 2000 cps, e.g., from about 50 cps to about 500 cps, preferably from about 50 cps to about 500 cps, and more preferably from about 100 cps to about 500 cps. According to certain embodiments, the viscosity is from about 100 cps to about 250 cps.

The polymerization solution can contain the anionic acrylic monomer (A), the crosslinking agent (B), and the non-ionic hydrophilic monomer (C) in a suitable ratio. The percentage of each monomer (A, B, or C) can be from about 0.1 to 30% by weight, preferably from about 0.1 to 20% by weight.

It is believed that the crosslinked coating comprises amide-ester crosslinks that form as a result of the reaction of the nonionic hydrophilic monomer with the crosslinking agent. For example, these bonds form as a result of the reaction of the hydroxyl groups in the hydroxyalkyl acrylate with the N-(isobutoxymethyl)-acrylamide. In addition, amide-amide crosslinks also form as a result of the reaction between two N-(isobutoxymethyl)acrylamide monomers. For example, the amide-ester crosslink can have the formula:



wherein R is divalent radical, preferably an alkoxyalkyl radical, and more preferably  $-CH_2-CH_2-CH_2-O-CH_2-$ . The amide-amide crosslink can have the formula:



wherein R is divalent radical, preferably an alkoxyalkyl radical, and more preferably  $-CH_2-O-CH_2-$ .

The coating solution contains the anionic polymer prepared as above and, optionally, a polysaccharide, preferably a dextran. The anionic polymer and the polysaccharide can be present in the coating solution in the ratio of from about 100:1 to about 1:100, preferably from about 10:1 to about 1:10, and more preferably from about 5:1 to about 1:5.

The coating solution contains the anionic polymer and, optionally dextran, in an amount of from about 0.01% to about

15 by weight, preferably from about 0.1% to about 10% by weight, and more preferably from about 0.5% to about 5% by weight of the coating solution. For example, the coating solution can contain 4.5% by weight of polymer and 1.5% by weight of dextran.

The pH of the coating solution can be adjusted suitably. For example, the pH of the coating solution containing a carboxylated polymer can be adjusted to about 3.0 to about 4.0 and preferably about 3.75. The pH of the coating can be adjusted by the addition of an acid or base. An example of a suitable base is 2N NaOH aqueous solution.

The coating solution is coated on a porous substrate, preferably a hydrophilic substrate. The hydrophilic porous substrate can be made of any suitable material; preferably, the substrate comprises a polymer. Examples of suitable polymers include polyaromatics, polysulfones, polyolefins, polystyrenes, polycarbonates, polyamides, polyimides, fluoropolymers, cellulosic polymers such as cellulose acetates and cellulose nitrates, and PEEK. Aromatic polysulfones are preferred. Examples of aromatic polysulfones include polyethersulfone, bisphenol A polysulfone, and polyphenylsulfone. Polyethersulfone is particularly preferred. The porous substrate can have any suitable pore size, for example, a pore size of below about 10  $\mu\text{m}$ , e.g., from about 0.01  $\mu\text{m}$  to about 10  $\mu\text{m}$ , preferably from about 0.1  $\mu\text{m}$  to about 5  $\mu\text{m}$ , and more preferably from about 0.2  $\mu\text{m}$  to about 5  $\mu\text{m}$ . The porous substrate can be asymmetric or, in a preferred embodiment, symmetric.

The porous substrate can be prepared by methods known to those of ordinary skill in the art. For example, the porous substrate can be prepared by a phase inversion process. Thus, a casting solution containing the polymer, a solvent, a pore former, a wetting agent, and optionally a small quantity of a non-solvent is prepared by combining and mixing the ingredients, preferably at an elevated temperature. The resulting solution is filtered to remove any impurities. The casting solution is cast or extruded in the form of a sheet or

hollow fiber. The resulting sheet or fiber is allowed to set or gel as a phase inverted membrane. The set membrane is then leached to remove the solvent and other soluble ingredients.

The porous substrate can be coated with the coating solution by methods known to those of ordinary skill in the art, for example, by dip coating, spray coating, meniscus coating, and the like. Dip coating, for example, can be carried out as follows. The substrate is immersed in the solution for a given period of time sufficient to insure complete or substantially complete coating of the pore walls. The immersion time can be from about 1 second to 1.0 minute, preferably from about 0.1 minutes to about 0.5 minutes, and more preferably from about 1/6 minute to about 1/3 minute. Following the immersion, the excess coating solution on the substrate is removed by allowing it to drain under gravity or by the use of a squeegee or air knife. The resulting coated substrate is cured to effect the curing or crosslinking of the coating composition.

Thus, the membrane can be cured below 150°C, e.g., at a temperature of from about 60°C to about 130°C, and preferably at a temperature of from about 80°C to about 130°C, for a suitable period of time, which can range from about 5 minutes to about 120 minutes and preferably from about 5 minutes to about 60 minutes. According to certain embodiments, the membrane is cured at a temperature of from about 120°C to about 125°C for a period of from about 20 minutes to about 30 minutes.

The resulting membrane can be washed to leach out any extractable in the membrane. Certain embodiments of the membrane, particularly a membrane having carboxyl functionality, are washed or leached in a basic solution, preferably at a pH of from about 8 to about 12. The leaching liquid can be prepared by adding a base such as sodium hydroxide, sodium carbonate, or sodium bicarbonate. The base can be added as a solid or a solution. Particular examples of pH's of the leaching liquid are about 11.9, about 11.4, and

about 8.1. These pH's can be achieved by the use of, e.g., a 2N NaOH solution, sodium carbonate, or sodium bicarbonate.

Illustratively, a carboxylated membrane can be washed or leached at a temperature of from about 37°C to about 93°C or higher and preferably from about 54°C to about 73°C or higher. A sulfonic acid containing membrane can be washed or leached at a temperature of from about 54°C to about 93°C or higher. Embodiments of the membrane also can be leached in hot deionized water, e.g., deionized water held above 73°F. The washing or leaching can be carried out for a suitable length of time, for example, for about 20 to about 30 minutes or more. According to certain embodiments of the membrane, the washing or leaching can be carried out for about 1 hour or more. The resulting membrane is then dried in air or in an oven to remove the water.

The present invention provides a process for preparing a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating having pendant anionic group. An embodiment of the process comprises:

- (a) providing a porous substrate;
- (b) contacting the substrate with a hydroxyl-rich material and a polymerized composition comprising an unsaturated monomer having an anionic group, at least one or more N-(hydroxyalkyl)- and/or N-(alkoxyalkyl)- acrylamides, a hydrophilic unsaturated monomer, and optionally an initiator;
- (c) curing the substrate obtained in (b) to obtain the negatively charged membrane; and
- (d) optionally, extracting the membrane obtained in (c) to remove extractable residue therein.

The present invention further provides a negatively charged membrane comprising a porous substrate and a crosslinked coating. An embodiment of the process comprises:

- (a) providing a porous substrate;
- (b) contacting the substrate with a polysaccharide and a polymerized composition comprising an unsaturated monomer having an anionic group, an N-(hydroxymethyl)- and/or N-(alkoxymethyl)- acrylamides, and an initiator;

(c) curing the substrate obtained in (b) to obtain the negatively charged membrane; and

(d) optionally, extracting the membrane obtained in (c) to remove extractable residue therein.

- 5       The present invention further provides, in an embodiment, a negatively charged microporous membrane comprising a porous support and a crosslinked coating wherein the crosslinked coating is prepared from a polymerized composition comprising an unsaturated monomer having an anionic group, an N-
- 10       (hydroxymethyl)- or N-(alkoxymethyl)-acrylamide, a nonionic hydrophilic acrylic monomer, and an initiator.

- The present invention further provides, in another embodiment, a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating
- 15       prepared from a polysaccharide and a polymerized composition comprising an unsaturated monomer having an anionic group, an N-(hydroxymethyl)- or N-(alkoxymethyl)- acrylamide, and an initiator.

- The present invention, in a further embodiment, provides
- 20       a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating prepared from a composition comprising an acrylic monomer having an anionic group, an N-(hydroxymethyl)- or N-(alkoxymethyl)- acrylamide, a nonionic hydrophilic acrylic monomer, and an initiator.

- 25       The present invention, in another embodiment, provides a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating prepared from a polysaccharide and a polymerized composition comprising an acrylic monomer having an anionic group, an N-(hydroxymethyl)-
- 30       or N-(alkoxymethyl)- acrylamide, and an initiator.

- The present invention further provides a device e.g., a filter device, chromatography device, macromolecular transfer device, flow distributor arrangement, and/or a membrane module comprising one or more negatively charged membranes of the
- 35       present invention. The device can be in any suitable form. For example, the device can include a filter element comprising the negatively charged membrane in a substantially

planar or pleated form. In an embodiment, the element can have a hollow generally cylindrical form. If desired, the device can include the filter element in combination with upstream and/or downstream support or drainage layers. The device can include a plurality of membranes, e.g., to provide a multilayered filter element, or stacked to provide a membrane module, such as a membrane module for use in membrane chromatography. Filter cartridges can be constructed by including a housing and endcaps to provide fluid seal as well as at least one inlet and at least one outlet. The devices can be constructed to operate in crossflow or tangential flow mode as well as dead-end mode. Accordingly, the fluid to be treated can be passed, for example, tangentially to the membrane surface, or passed perpendicular to the membrane surface.

For embodiments of the membrane which are in the form of a tube or fiber, or bundles of tubes or fibers, the membrane can be configured as modules, e.g., after potting their ends with an adhesive. For a description of illustrative chromatographic devices, porous medium modules, and flow distributor arrangements, see U.S. Provisional Patent Application Nos. 60/121,667 and 60/121,701, both filed on February 25, 1999; U.S. Provisional Patent Application Nos. 60/168,738 and 60/168,750, both filed on December 6, 1999; and International Applications filed on February 25, 2000 and entitled "Positively Charged Membrane" by Xiaosong Wu, Chung-Jen Hou, Jayesh Dharia, Peter Konstantin, and Yujing Yang; "Chromatography Devices and Flow Distributor Arrangements Used in Chromatography Devices" by Mark Hurwitz, Thomas Sorensen, John Stempel, and Thomas Fendya; and "Chromatography Devices, Porous Medium Modules Used in Chromatography Devices and Methods for Making Porous Medium Modules" by Mark Hurwitz, Thomas Fendya, and Gary Bush. See also UK Patent Application GB 2 275 626 A.

The membrane of the present invention has one or more advantageous properties, including high water permeability dynamic protein binding capacity, and charge density. Thus,

for example, the membrane preferably has a water flow rate above 5 mL/min/cm<sup>2</sup>, and preferably above 10 mL/min/cm<sup>2</sup>, e.g., from about 20 mL/min/cm<sup>2</sup> to about 160 mL/min/cm<sup>2</sup>, and preferably from about 25 mL/min/cm<sup>2</sup> to about 100 mL/min/cm<sup>2</sup> at 5 24 inch Hg. The membrane is robust and can withstand high treatment fluid flow rates. Thus, the membrane can be subjected to flow rates up to 10 cm/min, for example, from about 1 cm/min to 10 cm/min at 10 psi. The membrane has an open water bubble point of below about 70 psi, e.g., from 10 about 2.5 psi to about 70 psi, and preferably from about 5 psi to about 50 psi.

The membrane of the present invention has a high charge density. The charge density of the membrane can be measured by methods known to those of ordinary skill in the art. For 15 example, the charge density can be measured by the membrane's ability to bind a positively charged dye. Illustratively, the membrane has a Methylene Blue dye binding capacity of at least about 10 mL, e.g., from about 10 mL to about 1000 mL, and preferably from about 100 mL to about 800 mL, when tested with 20 a 10 ppm dye solution in water. Methylene Blue is a positively charged dye. The dye binding capacity is measured by filtering under a 24 inch Hg negative pressure, a 10 ppm by weight solution, pH 6.6, of Methylene Blue dye in a membrane disc of 25 mm diameter, and monitoring the volume of the 25 filtrate until a trace of the dye begins to appear in the filtrate.

The membrane of the present invention has a high specific protein binding capacity. The membrane has a lysozyme specific binding capacity of above 10 mg/mL, e.g., from about 30 10 mg/mL to about 130 mg/mL and preferably from about 25 mg/mL to about 120 mg/mL. The specific binding capacity can be determined by the following illustrative method. A fluid containing a lysozyme protein in 10 mM MES buffer, pH 5.5, is filtered by passing through a membrane at 1 cm/min and the 35 concentration of the protein in the filtrate is measured as a function of time. The concentration of the protein can be determined spectrophotometrically, e.g., by measuring the



absorbance of the protein at 280 nm. A breakthrough curve such as the one shown in Fig. 1 can then be constructed with the x-axis depicting the time of the filtration experiment and the y-axis depicting the protein concentration in the filtrate. The membrane has high specific protein binding capacity and low non-specific or hydrophobic binding. The slope of the breakthrough curve obtained on the membrane is vertical or substantially vertical. This characteristic offers improved resolution and separation of proteins. The membrane also has high dynamic protein binding capacity.

An advantage of the membrane of the present invention is that proteins do not leak prior to breakthrough. Another advantage of the present invention is that the components of the membrane are carefully chosen so that the membrane is free or substantially free of grafts or covalent links between the coating and the substrate. The preparation of negatively charged membranes of the present invention involves a chemistry and procedure that is relatively simple and easy to practice.

The properties of the membranes of the present invention make them attractive for use in the detection, separation, and/or purification of biomolecules such as proteins, amino acids, nucleic acids, and viruses. Examples of nucleic acids include modified or unmodified, synthetic or natural RNA and DNA.

The membranes of the present invention find use in various applications such as filtration of fluids containing positively charged atoms, molecules, and particulates, and macromolecular transfer from electrophoresis gels such as the transfer of nucleic acids and proteins from electrophoresis gels to an immobilizing matrix. The membrane can find use in the separation or purification of components present in biological fluids. Thus, for example, the membrane can find use in the purification of human albumins from the serum, in the therapeutic fractionation of blood, and separation of the components in genetically engineered cell cultures or fermentation broths. The membrane can be used in the

purification of, for example, viral vaccines and gene therapy vectors such as adeno-associated viruses.

Accordingly, the present invention provides a process for treating a fluid containing biomolecules, the process comprising placing the fluid in contact with the negatively charged membrane. The positively charged materials adsorbed on the membrane can be recovered by eluting with a suitable solvent eluant. The present invention further provides a process for selectively adsorbing one or more biomolecules from fluid containing a mixture of biomolecules comprising contacting the fluid with the membrane under conditions favorable to the adsorption of selected biomolecules. The present invention further provides a process for selectively releasing one or more biomolecules from a membrane of the present invention comprising contacting the membrane having adsorbed biomolecules with an eluant under conditions favorable to the release of the selected biomolecules. The present invention further provides a process for macromolecular transfer from an electrophoresis gel comprising contacting a membrane of the present invention with the electrophoresis gel, and transferring the macromolecules from the gel to the membrane.

The negatively charged membrane of the present invention is particularly suitable for treating fluids containing biomolecules that have a positive surface charge for the given pH of the fluid. For example, lysozyme has an isoelectric point of 11.25, and it can be purified by using the negatively charged membrane of the present invention from a low salinity, for example 10mM MES, fluid that is pH 5.5. Proteins with different surface charges may also be separated using the membrane of the present invention, for example separating lysozyme from Cytochrome C.

Thus, a mixture of lysozyme and Cytochrome C can be separated as follows. 80  $\mu$ l of a fluid containing 3 mg/ml lysozyme and 1 Cytochrome C can be placed on a chromatographic column or stack of 5 layers of a 25 mm diameter negatively charged membrane of the present invention. The column or

stack can be eluted under a gradient - 7 ml from 10 mM MES buffer at a pH of 5.5 to 1M NaCl-10 mM MES buffer at a pH of 5.5. The flow rate can be 4 ml/min. Cytochrome C elutes first, followed by lysozyme.

- 5       The following examples further illustrate the present invention but should not be construed in any way limiting the scope of the invention.

#### EXAMPLE 1

- 10       This Example illustrates a method of preparing a polymer composition for preparing an embodiment of the negatively charged membrane of the present invention.

- 2-Acrylamido-2-methyl-1-propanesulfonic acid, N-(isobutoxymethyl)acrylamide, and hydroxypropyl methacrylate  
15       were combined in a weight ratio of 8.0:2.5:1.5 in a methanol-water medium to obtain a polymerization solution having a solids content of 12% by weight. Ammonium persulfate was used as the initiator at 0.3% by weight of the solution. The polymerization was carried out for a period of about 10-15  
20       hours at ambient temperature (20-25°C). The resulting solution had a viscosity of 166 cps.

#### EXAMPLE 2

- 25       This Example illustrates a method for preparing an embodiment of the negatively charged membrane of the present invention. This Example further illustrates the properties of that embodiment.

- A coating solution was prepared by mixing the polymerization solution described in Example 1 and a water  
30       solution of dextran, molecular weight 148 K, so that the resulting solution contains polymer and dextran in the weight ratio of 3:1.

- A hydrophilic microporous polyethersulfone substrate having a pore size of about 0.8  $\mu$ m was coated with the above  
35       coating solution. The coated substrate was cured in an oven at 100-110°C for 1 hour, followed by washing it in boiling DI

water for 1 hour. The resulting membrane was dried in an oven to obtain an embodiment of the present invention.

The membrane obtained above was tested for treatment of a solution containing lysozyme. The solution was contained  
5 206.4  $\mu\text{g}$  per ml of 10 mM MES buffer at pH 5.5. The treatment fluid flow rate was 4 ml/min. Two membrane discs of 25 mm diameter were stacked together. The breakthrough curve obtained is set forth in Fig. 1. The membrane had a lysozyme binding capacity of 97 mg/ml. The relatively flat curve  
10 obtained during the first 10 minutes of the treatment confirmed that the membrane did not leak. The nearly vertical slope indicates that the membrane was capable of providing high resolution.

15

### EXAMPLE 3

This Example illustrates a method for preparing an embodiment of the negatively charged membrane of the present invention. This Example further illustrates the properties of that embodiment.

20

A coating solution was prepared by mixing the polymerization solution described in Example 1 and a water solution of dextran, molecular weight 148 K, so that the resulting solution contains polymer and dextran in the weight ratio of 4:1.

25

A hydrophilic microporous cellulose nitrate substrate having a pore size of about 0.8  $\mu\text{m}$  was coated with the above coating solution. The coated substrate was cured in an oven at 100-110°C for 1 hour, followed by washing it in boiling DI water for 1 hour. The resulting membrane was dried in an oven  
30 to obtain an embodiment of the present invention.

35

The membrane obtained above was tested with a solution containing lysozyme. The solution was contained 201.3  $\mu\text{g}$  per ml of 10 mM MES buffer at pH 5.5. The treatment fluid flow rate was 4 ml/min. Two membrane discs of 25 mm diameter were  
stacked together. The breakthrough curve obtained is set forth in Fig. 2. The membrane had a lysozyme binding capacity of 77 mg/ml. The relatively flat curve obtained during the

first 10 minutes of the treatment confirmed that the membrane did not leak. The nearly vertical slope indicates that the membrane was capable of providing high resolution.

5

EXAMPLE 4

This Example illustrates a method for preparing another embodiment of the negatively charged membrane of the present invention. This Example further illustrates the properties of that embodiment.

10 2-Acrylamidoglycolic acid, 2-carboxyethyl acrylate, N-(isobutoxymethyl)acrylamide, N-(hydroxymethyl)-acrylamide, and hydroxypropyl acrylate were combined in a weight ratio of 5.0:5.0:3.0:1.5:1.5 in a methanol-water medium to obtain a  
15 polymerization solution having a solids content of 16% by weight. Ammonium persulfate was used as the initiator at 0.4% by weight of the solution. The polymerization was carried out for a period of about 16-24 hours at ambient temperature. The resulting solution had a viscosity of 116 cps. A coating  
20 solution was prepared by mixing the polymerization solution and a water solution of dextran, molecular weight 148 K, so that the resulting solution contained 4% polymer and 1.33% dextran by weight.

A hydrophilic microporous polyethersulfone substrate having a pore size of about 0.8  $\mu\text{m}$  was coated with the above  
25 coating solution. The coated substrate was cured in an oven at 100-110°C for 1 hour, followed by washing it in boiling DI water for 1 hour. The resulting membrane was dried in an oven to obtain another embodiment of the present invention.

The membrane obtained above was tested with a solution  
30 containing lysozyme. The solution was contained 213.6  $\mu\text{g}$  per ml of 10 mM MES buffer at pH 5.5. The treatment fluid flow rate was 4 ml/min. Two membrane discs of 25 mm diameter were stacked together. The breakthrough curve obtained is set forth in Fig. 3. The membrane had a lysozyme binding capacity  
35 of 45 mg/ml. The relatively flat curve obtained during the first 10 minutes of the treatment confirmed that the membrane

did not leak. The nearly vertical slope indicates that the membrane was capable of providing high resolution.

All references cited herein, including patents, patent applications, and publications, are incorporated by reference  
5 in their entireties.

While this invention has been described with an emphasis upon several embodiments, it will be obvious to those of ordinary skill in the art that variations of the embodiments may be used and that it is intended that the invention may be  
10 practiced otherwise than as specifically described herein. Accordingly, this invention includes all modifications encompassed within the spirit and scope of the invention as defined by the following claims.

**WHAT IS CLAIMED IS:**

1. A negatively charged microporous membrane comprising a porous substrate and a crosslinked coating having pendant  
5 anionic groups.
2. The negatively charged microporous membrane of claim 1, wherein the crosslinked coating is prepared from a polymerized composition comprising an unsaturated monomer having an  
10 anionic group, at least one or more N-(hydroxyalkyl)- or N-(alkoxyalkyl)- acrylamide, and a hydrophilic unsaturated monomer.
3. The negatively charged microporous membrane of claim 2,  
15 wherein the hydrophilic unsaturated monomer is nonionic.
4. The negatively charged microporous membrane of claim 3, wherein the hydrophilic unsaturated monomer is an acrylic monomer.  
20
5. The negatively charged microporous membrane of claim 2, wherein the N-(hydroxyalkyl)- or N-(alkoxyalkyl)- acrylamide includes an alkyl group of 4 carbon atoms or less.
- 25 6. The negatively charged microporous membrane of claim 1, wherein the crosslinked coating includes a hydroxyl-rich material.
7. The negatively charged microporous membrane of claim 6,  
30 wherein the hydroxyl-rich material is a polysaccharide.
8. The negatively charged microporous membrane of claim 6 or 7, wherein the coating further includes a polymerized composition comprising an unsaturated monomer having an  
35 anionic group and an N-(hydroxyalkyl)- or N-(alkoxyalkyl)- acrylamide.

9. The negatively charged microporous membrane of any of claims 1-8, wherein said anionic group is a sulfonic or carboxylic acid.

5 10. The negatively charged microporous membrane of claim 2 or 8, wherein the coating is prepared from composition that further includes an initiator.

11. The negatively charged microporous membrane of claim 3,  
10 wherein said unsaturated monomer is an acrylic monomer having a sulfonic or carboxylic acid group.

12. The negatively charged microporous membrane of claims 11, wherein said acrylic monomer is an acrylate or acrylamide.

15 13. The negatively charged microporous membrane of claim 12, wherein said acrylic monomer is an acrylamide.

14. The negatively charged microporous membrane of claim 13,  
20 wherein said acrylamide is an alkylacrylamide.

15. The negatively charged microporous membrane of claim 13, wherein said acrylamide has a sulfonic acid group.

25 16. The negatively charged microporous membrane of claim 15, wherein said acrylamide is acrylamido-N-alkylsulfonic acid.

17. The negatively charged microporous membrane of claim 13, wherein said monomer is an acrylamide having a carboxylic acid  
30 group.

18. The negatively charged microporous membrane of claim 17, wherein said composition includes a further acrylic monomer having a carboxylic acid group.

35 19. The negatively charged microporous membrane of claim 18, wherein said further acrylic monomer is an acrylate.



20. The negatively charged microporous membrane of claim 19,  
wherein said acrylate is  $\beta$ -carboxyethyl acrylate.
- 5 21. The negatively charged microporous membrane of claim 4,  
wherein said acrylic monomer is a hydroxyacrylic monomer.
22. The negatively charged microporous membrane of claim 21,  
wherein said hydroxyacrylic monomer is a hydroxyacrylamide or  
10 an hydroxyacrylate.
23. The negatively charged microporous membrane of any of  
claims 2-5, wherein said composition includes an N-  
(alkoxymethyl)acrylamide.
- 15 24. The negatively charged microporous membrane of claim 10,  
wherein said initiator is a free radical initiator.
25. The negatively charged microporous membrane of claim 2 or  
20 6, wherein said polysaccharide is dextran.
26. The negatively charged microporous membrane of any of  
claims 2-5, wherein said composition further includes a  
polysaccharide.
- 25 27. The negatively charged microporous membrane of claim 26,  
wherein said polysaccharide is dextran.
28. A negatively charged microporous membrane having a dynamic  
30 protein binding capacity of about 25 mg/ml lysozyme or more  
comprising a porous substrate and a crosslinked coating that  
provides a fixed negative charge to the membrane.
29. A negatively charged microporous membrane comprising a  
35 porous substrate and a crosslinked coating comprising anionic  
groups and amide-amide and amide-ester crosslinks.

30. The negatively charged microporous membrane of any of claims 1-29, wherein said porous substrate comprises a substrate polymer.

5 31. The negatively charged microporous membrane of claim 30, wherein said substrate polymer is selected from the group consisting of polyaromatics, polysulfones, polyolefins, polystyrenes, polyamides, polyimides, cellulose acetates, cellulose nitrates, polycarbonates, polyesters, and  
10 fluoropolymers.

32. The negatively charged microporous membrane of claim 31, wherein said substrate polymer is a polysulfone.

15 33. The negatively charged microporous membrane of any of claims 1-33, wherein said substrate is hydrophilic.

34. A device comprising the negatively charged microporous membrane of any of claims 1-33.

20

35. A process for preparing a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating having anionic groups, the process comprising:

(a) providing a porous substrate;

25 (b) contacting said substrate with a polymerized composition comprising an unsaturated monomer having an anionic group, at least one or more of a N-(hydroxyalkyl)- or N-(alkoxyalkyl)- acrylamide, a hydrophilic unsaturated monomer, and an initiator;

30 (c) curing the substrate obtained in (b) to obtain the negatively charged membrane; and

(d) optionally, extracting the membrane obtained in (c) to remove extractable residue therein.

35 36. A process for preparing a negatively charged microporous membrane comprising a porous substrate and a crosslinked coating having anionic groups, the process comprising:

- (a) providing a porous substrate;
- (b) contacting said substrate with a polysaccharide and a polymerized composition comprising an unsaturated monomer having an anionic group, an N-(hydroxymethyl)- or N-(alkoxymethyl)- acrylamide, and an initiator;
- 5 (c) curing the substrate obtained in (b) to obtain the negatively charged membrane; and
- (d) optionally, extracting the membrane obtained in (c) to remove extractable residue therein.

10

37. The process of claim 35 or 36, wherein said anionic group is a sulfonic or carboxylic acid.

15

38. The process of claim 37, wherein said unsaturated monomer is an acrylic monomer having a sulfonic or carboxylic acid group.

20

39. The process of claim 38, wherein said acrylic monomer having a sulfonic or carboxylic acid group is an acrylate or an acrylamide.

40. The process of claim 35 or 36, wherein said coating composition further includes a hydroxyl-rich material.

25

41. The process of any of claims 35-40, wherein said porous substrate comprises a substrate polymer.

42. The negatively charged membrane prepared by the process of any of claims 35-41.

30

43. A process for separating positively charged material from a fluid, said process comprising placing said fluid in contact with the negatively charged microporous membrane of any of claims 1-44 and 62 so as to adsorb the positively charged material to said membrane.

35

44. The process of claim 43, wherein said material is a biomolecule.


45. A process for transferring biomolecules from an  
5 electrophoresis gel comprising contacting said gel with a membrane of any of claims 1-44 and 42 and transferring the biomolecules to the membrane.

46. The process of claim 45, wherein said biomolecule is  
10 selected from the group consisting of proteins, polypeptides, amino acids, and nucleic acids, and combinations thereof.

47. The process of claim 43 or 44, further including  
15 recovering the positively charged material adsorbed on the membrane.


1/3

Figure 1

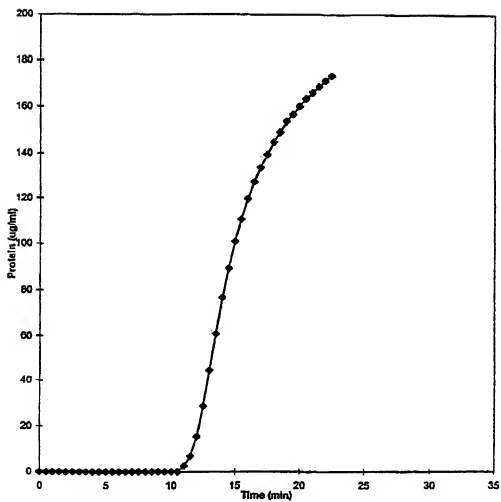


2/3

Figure 2

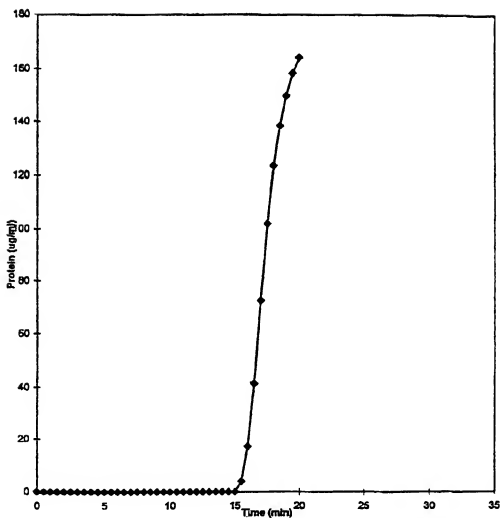

3/3

Figure 3

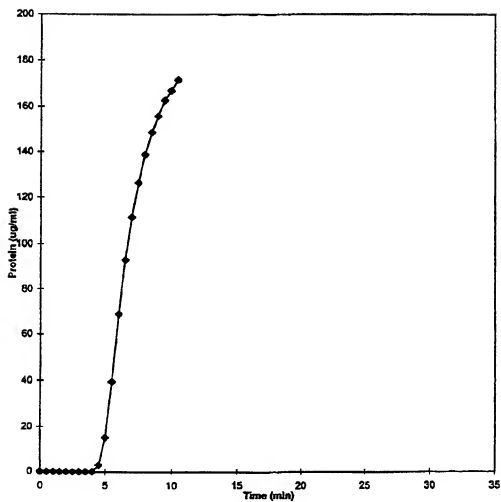

## INTERNATIONAL SEARCH REPORT

Internat. Application No.

PCT/US 00/04745

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01D67/00 B01D61/00 B01J39/20 B01J47/12 B01J20/32

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01D B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 021 160 A (S.M. WOLPERT) 4 June 1991 (1991-06-04)  the whole document	1-5, 9-16, 21-24, 28-35, 37-39, 41-44
X	WO 98 17377 A (MC MASTER UNIVERSITY) 30 April 1998 (1998-04-30)  page 5, line 8 - line 14 page 36  -/-	1,9,28, 30,31, 34,43

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

11 July 2000

Date of mailing of the international search report

19/07/2000

Name and mailing address of the ISA  
European Patent Office, P.B. 5618 Patentamt 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hilgenga, K



## INTERNATIONAL SEARCH REPORT

Internat. Application No.

PCT/US 00/04745

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 474 617 A (MONSANTO COMPANY) 11 March 1992 (1992-03-11)	1,6,7,9, 28, 30-34, 43,44 26
A	page 5, line 40 - line 45; claims 9,15	
A	US 5 843 789 A (H. NOMURA) 1 December 1998 (1998-12-01)	1,9,11, 28, 30-34, 43,44
	column 6, line 44 column 10, line 51 - line 65	
A	US 4 455 370 A (B.W. BARTELSMAN) 19 June 1984 (1984-06-19) claim 1	45,46
A	US 5 783 094 A (M.A. KRAUS) 21 July 1998 (1998-07-21)	
A	US 4 617 321 A (R.J. MACDONALD) 14 October 1986 (1986-10-14)	
A	DE 44 39 444 A (MERCK PATENT) 9 May 1996 (1996-05-09)	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

Internet J Application No

PCT/US 00/04745

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5021160 A	04-06-1991	WO 9110498 A	25-07-1991
WO 9817377 A	30-04-1998	AU 4613097 A EP 0948392 A JP 2000503898 T	15-05-1998 13-10-1999 04-04-2000
EP 474617 A	11-03-1992	US 5104729 A AU 633449 B AU 8254891 A CA 2049459 A,C JP 4250832 A	14-04-1992 28-01-1993 27-02-1992 21-02-1992 07-09-1992
US 5843789 A	01-12-1998	AU 5737596 A WO 9636877 A	29-11-1996 21-11-1996
US 4455370 A	19-06-1984	NONE	
US 5783094 A	21-07-1998	US 5895575 A AU 5309396 A EP 0869835 A WO 9632178 A	20-04-1999 30-10-1996 14-10-1998 17-10-1996
US 4617321 A	14-10-1986	NONE	
DE 4439444 A	09-05-1996	WO 9614151 A EP 0789620 A JP 10508249 T	17-05-1996 20-08-1997 18-08-1998